


1	2	3	4	5	6	7	8	
MOLD NO.		RFQ NO.: FCL004			REV.	DESCRIPTION	APPD.	DATE
					A	INITIAL RELEASED	WANG	12/02/15'

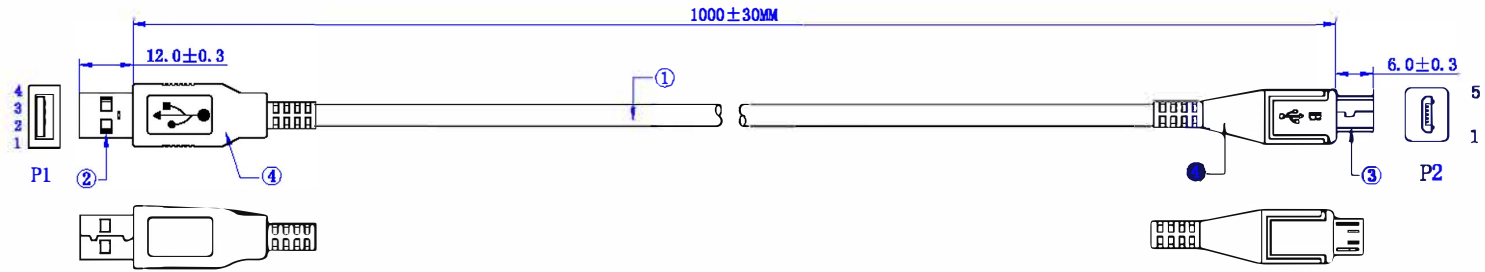


**PIN ASSIGNMENT**

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	5
Shell	Ground lead	Shell

**NOTE:**

- 100% OPEN AND SHORT ELECTRICAL TEST.
- TESTING CONDITIONS:  
VOLTAGE: 600V AC 1000V DC  
INSULATION RESISTANCE: 30 Mohms min.  
CONTACT RESISTANCE: 2 Ohms max.
- This is a RoHS assembly.



1PCS /BWG  
Has its own lock

CUS P/N:	Colour	length
61011-01	White	1M
61011-02	Black	1M

				UNDECLARED TOLERANCE		CUS P/N:		FLECONN PRECISION INDUSTRY (CHINA) CO., LIMITED		
				X.±1.0	X.*±2.0'					
④	OVERMOLD	PVB 45P Colour (Black Ro White)	15g	.X±0.5	.X*±1.0'	PART NO.: 61011-XX		TITLE: USB 2.0 CABLE 1M		
③	Connector	Micro UCB 5Pin 2.0 IN:G/F LCP NI PLATED SHELL	1PCS	.XX±0.2	.XX*±0.5'	APPD.:		DWG NO.: D0039		
②	Connector	UCB 2.0 A/M IN:G/F LCP NI PLATED SHELL	1PCS	UNITS: MM		CHKD.:		SCALE SHEET REV.		
①	Cable	UCB CABLE 2.0 28AWG*1P+28AWG*2C+D+AL OD: 3.2 L=1M	1PCS	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF Fleconn AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF Fleconn.		DR.: HWJ_12/02/15'		1:1 1/1 A		
ITEM	PART NAME	DESCRIPTION	QTY							